

Warranty Programs

Imasco Minerals engineers and manufactures its products to stringent quality control standards.

We are proud to stand behind our products and systems and offer comprehensive and clear warranties.

HIGHLIGHTS, FEATURES & REQUIREMENTS



For individual products, we offer a 5 Year Limited Materials Warranty.



For each of our Stucco Systems we offer 10 Year Limited Materials Warranty and Water Management Warranties.

- Imasco Minerals' warranties are clear and easy to read.
- Owner may choose from a list of experienced and reputable independent installers who have been certified by Imasco.
- Imasco provides generic details, instructions, guide specifications, inspection checklists and maintenance protocols.
- Assistance to the owner's inspectors or professionals who are responsible for site coordination and/or construction and installation review.
- Imasco engineers and blends its products from high quality materials to precise standards.
- 10 Year Limited Materials Warranties are available at project completion for qualifying projects.

Contact your local Imasco dealer or representative for more information.

From modern to traditional, Imasco Minerals has the exterior cladding system for your project

- CoreFactor EIFS •
- Traditional Stucco System •
- RainGuard MEGA Rainscreen System •

- Complete source and support • Generic design details • Research center
- Applicator education and certification • Full scale mockup detail test center

Installation using familiar materials following clear assembly guidelines

EIFS allows the designer to be as creative as their imagination

CERTIFIED APPLICATORS

Imasco certifies experienced independent applicators in the specifics of installing CoreFactor EIFS. Since our reputation rests with the craftsmanship and professionalism of the contractor, only the most experienced, reputable and qualified firms qualify.

**MODERN SOLUTIONS FROM THE LARGEST STUCCO MANUFACTURER
IN WESTERN CANADA WITH OVER 50 YEARS EXPERIENCE**

TEXTURE PORTFOLIO



Fine Sandfloat



Medium Sandfloat



Definition



Medium Scroll XL

Your contractor may be able to provide you with additional textures.

THE HEART OF EIFS
COREFACTOR

EIFS SIMPLIFIED BY IMASCO
Specializing in Dual Moisture Management



IMASCO MINERALS INC 19287 – 98A Avenue, Surrey, BC Canada V4N 4C8
t 604-888-3848 f 604-888-5671 www.imascominerals.com



IMASCO MINERALS INC.

It's what's on the inside that counts...

Imasco EIFS features 3 layers of protection... the inner layer; the drainage layer; and the outer layer.

CAVITY DRAINAGE


Drainage cavity featuring a specially designed grooved foam

MECHANICAL – 1

- FEATURES**
- Specially designed grooved foam
 - Two layers of secondary barrier
 - Insulation
 - Crack resistance
 - Color choice
 - Design flexibility
 - Low maintenance
 - Noise resistance
 - Aesthetic appeal
 - High-impact option


ADHESIVE – 2

- FEATURES**
- Specially designed grooved foam
 - Liquid applied
 - Protec-J provides weather barrier treatment for all penetrations and joints
 - Insulation
 - Crack resistance
 - Color choice
 - Design flexibility
 - Low maintenance
 - Noise resistance
 - Aesthetic appeal
 - High-impact option
 - CCMC 13334-R

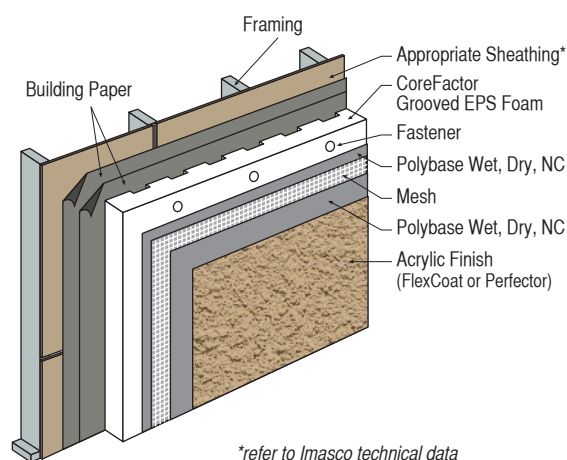

*refer to Imasco technical data for accepted substrates

**Designed for use in areas protected from inclement weather.

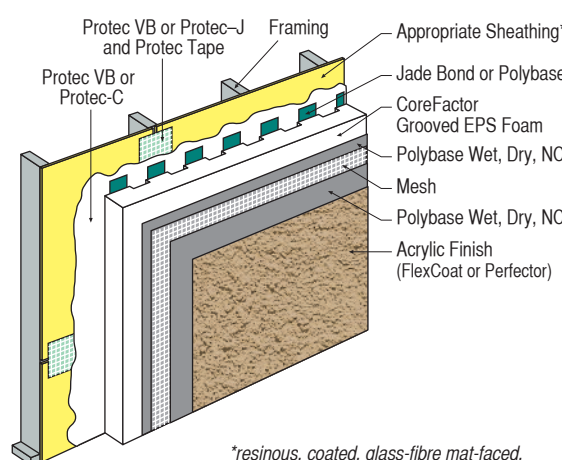

*resinous, coated, glass-fibre mat-faced, water-resistant core gypsum (or equivalent) sheathing board

BASIC DRAINAGE


Incorporates drainage plane for incidental moisture

MECHANICAL – 3

- FEATURES**
- Two layers of secondary barrier
 - Weather barrier with a specially engineered surface texture to provide moisture drainage
 - Insulation
 - Crack resistance
 - Color choice
 - Design flexibility
 - Low maintenance
 - Noise resistance
 - Aesthetic appeal
 - High-impact option

ADHESIVE – 4

- FEATURES**
- Liquid applied
 - Protec-J provides weather barrier treatment for all penetrations and joints
 - Vertical adhesive ribbons create channels for drainage of incidental moisture
 - Insulation
 - Crack resistance
 - Color choice
 - Design flexibility
 - Low maintenance
 - Noise resistance
 - Aesthetic appeal
 - High-impact option
 - CCMC 13334-R

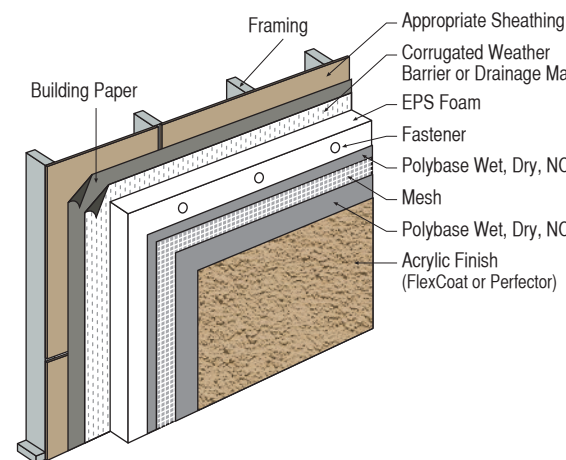

*resinous, coated, glass-fibre mat-faced, water-resistant core gypsum (or equivalent) sheathing board


**Designed for use in areas protected from inclement weather.

STANDARD

2 layers of weather resistive barrier

MECHANICAL – 5

- FEATURES**
- Two layers of secondary barrier
 - Insulation
 - Crack resistance
 - Color choice
 - Design flexibility
 - Low maintenance
 - Noise resistance
 - Aesthetic appeal
 - High-impact option
 - For use in dryer climates

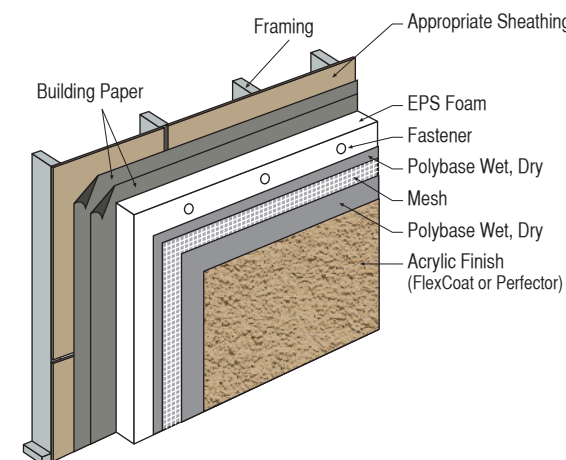

**Designed for use in areas protected from inclement weather.


THE HEART OF EIFS
COREFACTOR

SPECIALTY SYSTEMS

Fire Control / Moisture Control / Insulated Concrete Forms (ICF)

NON-COMBUSTIBLE – NC


- FEATURES**
- Non-combustible system
 - Specially designed Grooved Mineral Wool option
 - 10 Year Extended Material Defect Warranty
 - PolyShield provides an air/moisture barrier
 - Insulation
 - High-impact option (Armour mesh)
 - Low maintenance
 - Aesthetic appeal
 - Noise resistance
 - Design flexibility
 - Crack resistance
 - Color choice

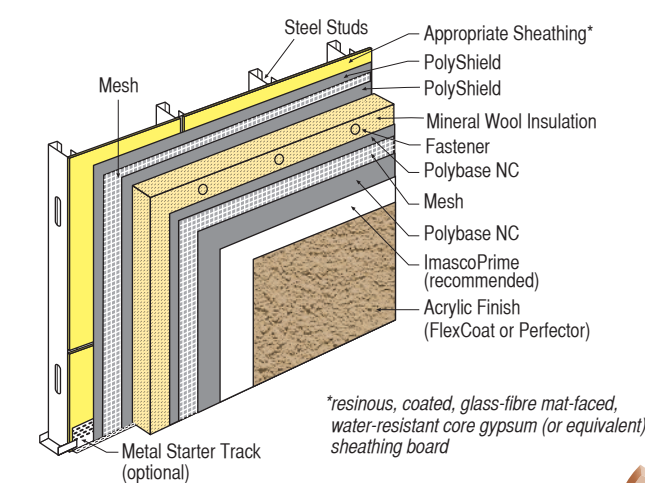

*resinous, coated, glass-fibre mat-faced, water-resistant core gypsum (or equivalent) sheathing board

ICF – 8


- FEATURES**
- No rot
 - 4-hour fire rating
 - Very high 'R'-value
 - Storm / debris resistant
 - No thermal bridging / thermal inertia
 - STS Ratings of 55+ (4 to 5 times quieter than wood)
 - Design flexibility
 - By using ICFs and concrete, 18 points can be achieved in the LEED rating system
 - Color choice
 - Aesthetic appeal
 - Low maintenance
 - High impact option
 - PolyShield provides an air/moisture barrier

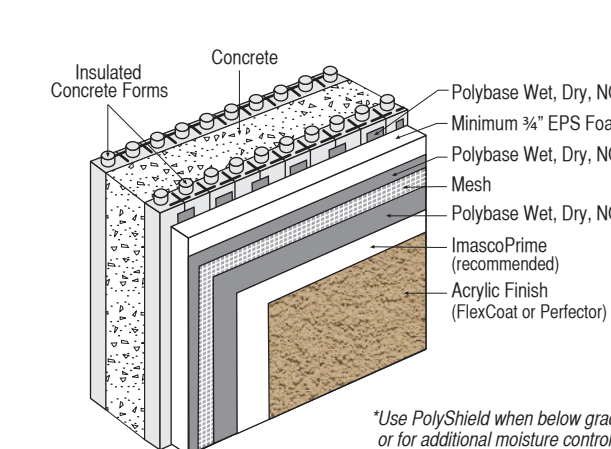

*Use PolyShield when below grade or for additional moisture control

INTERIOR POOL AREA – 7


- FEATURES**
- Vapour and moisture resistant
 - 10 Year Extended Material Defect Warranty
 - PolyShield provides an air/moisture barrier
 - Aesthetic appeal
 - Color choice
 - Low maintenance

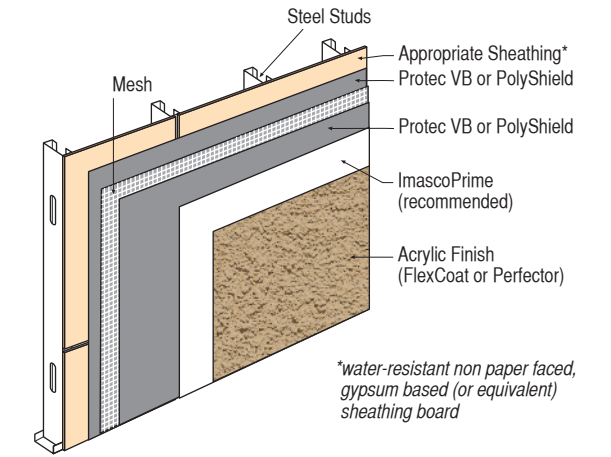

*water-resistant non paper faced, gypsum based (or equivalent) sheathing board

ICF – 8 (PUNCTURE RESISTANT)

- FEATURES**
- No rot
 - 4-hour fire rating
 - Very high 'R'-value
 - Storm / debris resistant
 - No thermal bridging / thermal inertia
 - STS Ratings of 55+ (4 to 5 times quieter than wood)
 - Design flexibility
 - By using ICFs and concrete, 18 points can be achieved in the LEED rating system
 - Color choice
 - Aesthetic appeal
 - Low maintenance
 - High impact option
 - PolyShield provides an air/moisture barrier

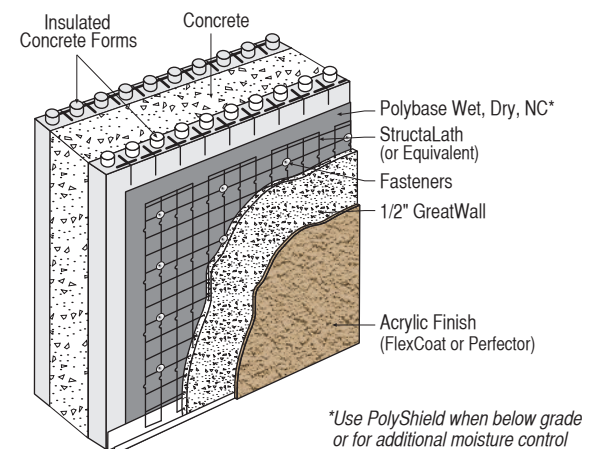

*Use PolyShield when below grade or for additional moisture control